


Off Set Fold-Up Door

Installation Specs: Counterweight Doors

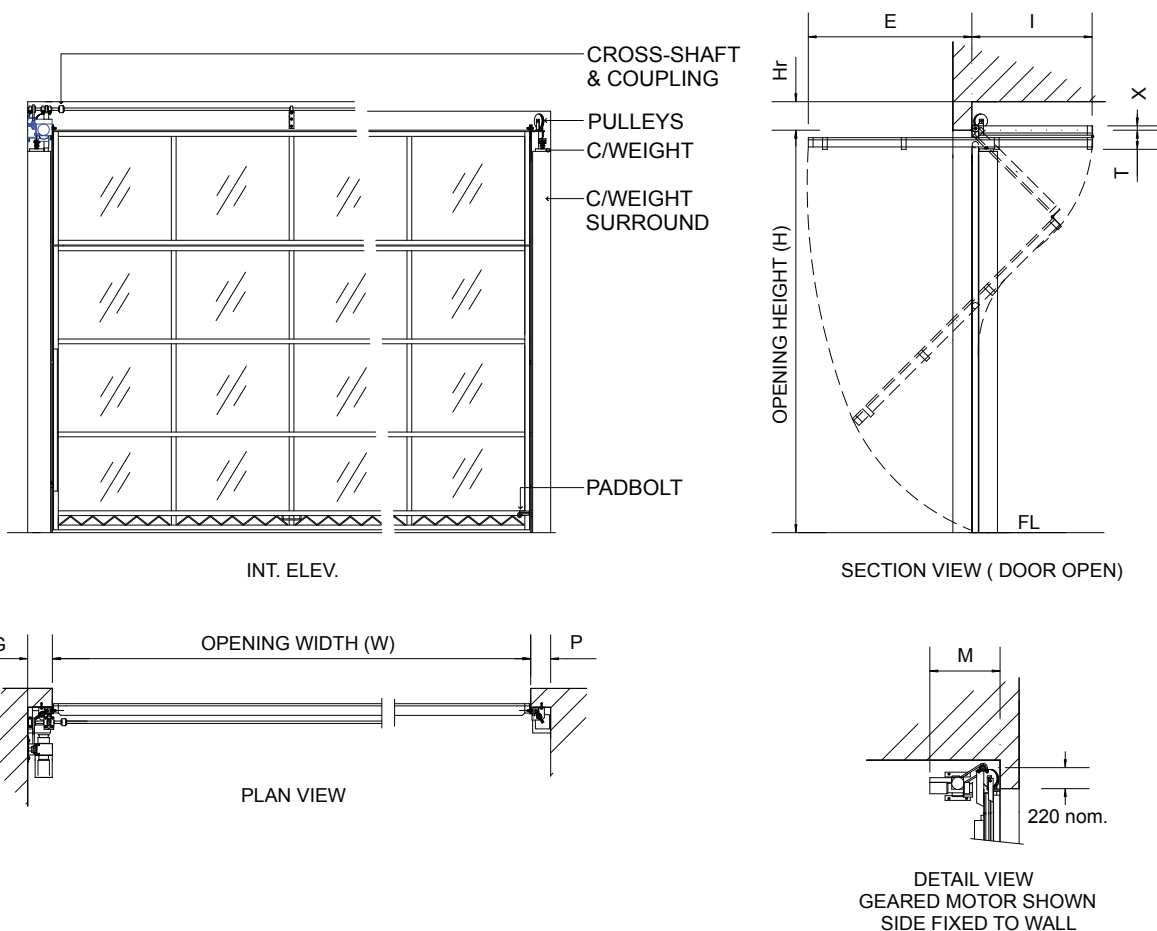

CLEARANCE DETAILS

Height x Width		WIDTH UP TO 3M						WIDTH UP TO 6M					
H	TYPE	G	P	Hr	T	D	X	G	P	Hr	T	D	X
2.5M	S	P	150	180	210	250	75	P	200	210	250	280	125
	GI	P	200	210	210	280	75	P	250	250	250	280	125
	EL	260	260	400		280	75	300	300	400		280	125
3.6M	S	P	150	180	210	250	75	P	200	210	250	280	125
	GI	P	200	210	210	280	75	P	250	250	250	280	125
	EL	260	260	400		280	75	300	300	400		280	125

NOTES:

S - Manual Sheeted door,
 GI - Manual Glazed door,
 EL - Door motorised,
 T - includes 25mm cladding thickness,
 C (Counterweight cover width) - in most cases equals G or P minus 20mm.
 $E = \text{Height minus } I$
 $I = (H/3.5) + 70$
 M - Varies with motor location, type and size. See Industrial Operators.

NOTES:

G - Sideroom motor side
 P - Sideroom, plain side
 Hr - Pulley headroom
 T - Total door thickness under lintel
 D - Depth at c/weight cover
 X - Door travel rise